

M400DS INNER LID REPLACEMENT

REMOVAL / INNER LID



CAUTION: Do not twist the hooks or apply excessive force, as this may damage the parts, and wear protective gloves.

01 Before you begin

Stop using the unit. Open the front door and remove the refill cartridge to clear the work area. Place the waste bin upside down on a protected, flat surface.

02 Method A | Release the hooks from below

Press the hooks inward in sequence (1 → 2 → 3 → 4) to release them, then carefully remove the existing inner lid.

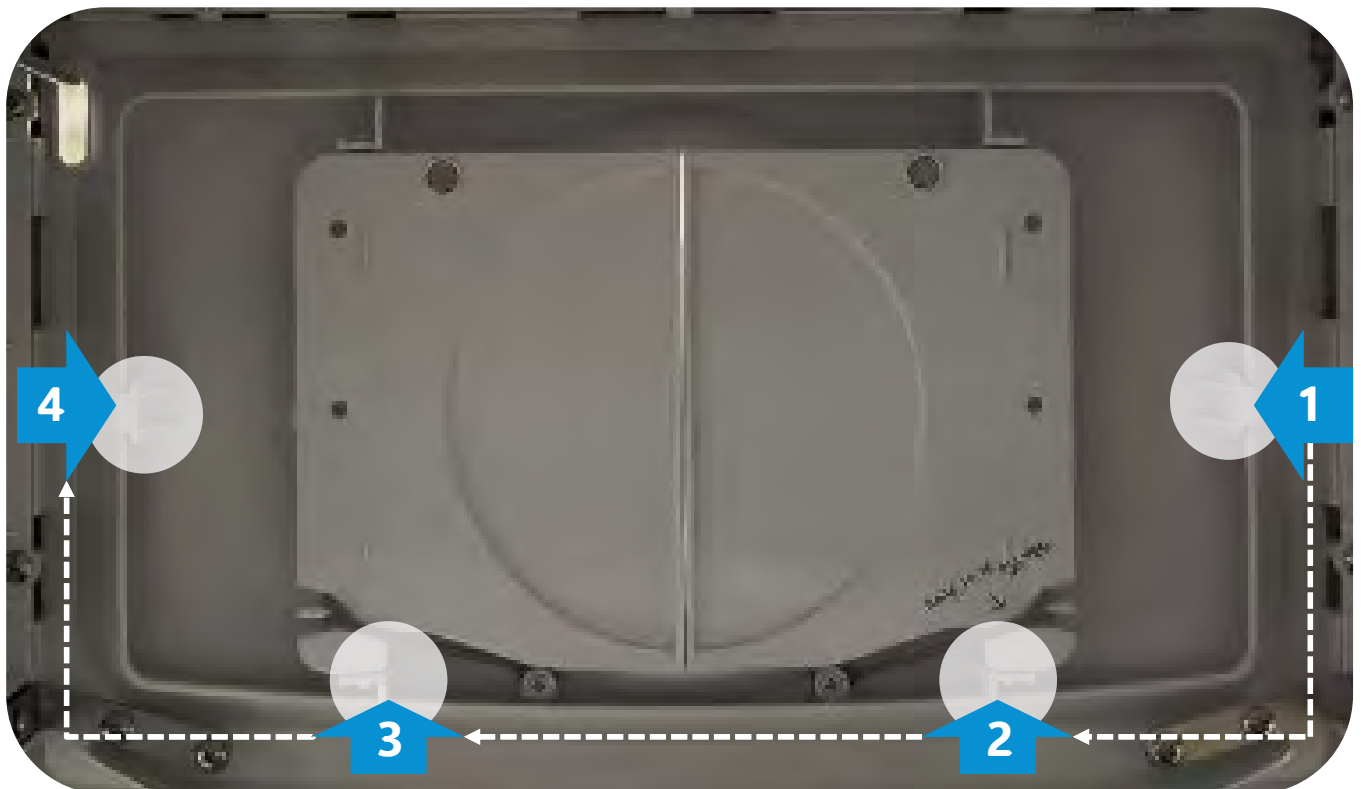


Front Door Side

M400DS INNER LID REPLACEMENT

ALTERNATIVE REMOVAL / INSTALLATION

03 Method B | Remove from above (alternative)

When accessing from above, disengage the retaining hook points shown in the demonstration, then lift out the inner lid.

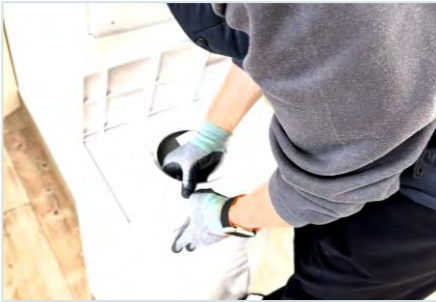

04 Install the replacement inner lid



01 Align the lid

Position the replacement inner lid over the opening, aligned with its frame.



02 Press into place

Press evenly along the edges until the retaining hooks engage.

05 Final Step



Check that the inner lid is seated flat and securely attached. Verify that the round opening operates freely, reinstall the refill cartridge, and close the front door.

Scan for the official M400DS product page
janibell.com | DS Type 400

